

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 September 2001 (13.09.2001)

PCT

(10) International Publication Number
WO 01/67794 A1

(51) International Patent Classification⁷: H04Q 7/38, 7/22

(21) International Application Number: PCT/EP01/02401

(22) International Filing Date: 2 March 2001 (02.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

60/187,547 7 March 2000 (07.03.2000) US
09/693,575 20 October 2000 (20.10.2000) US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).

(72) Inventor: DJUPHAMMAR, Hakan, O.: 12959 Chaparral Ridge, San Diego, CA 92130 (US).

(74) Agents: FÜCHSLE, Klaus et al.: Hoffmann.Eitle, Arabellastrasse 4, 81925 München (DE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHODS AND APPARATUS FOR DUAL MODE OPERATION IN A WIRELESS COMMUNICATION SYSTEM

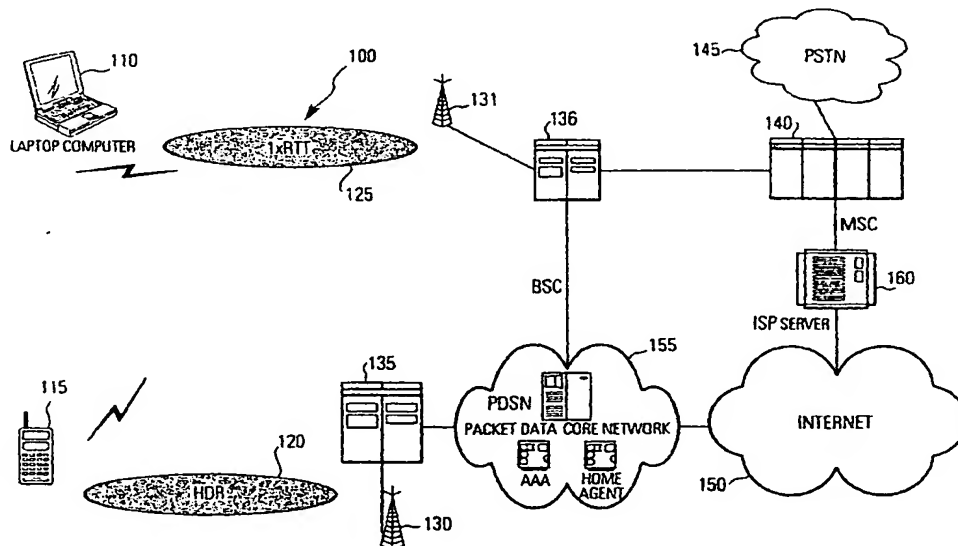

(57) Abstract: A wireless network terminal tunes to a best effort carrier, such as a high data rate ("HDR") HDR carrier, when in an idle state. The terminal periodically scans an all-services carrier, such as a 1xRTT carrier, for pages, SMS and other information. Should the scan detect an incoming communication on the all-services carrier, any existing best-effort carrier packet session is terminated so that the terminal may tune to the all-services carrier to receive the incoming communication. If the coverage area does not support a best-effort carrier, the terminal tunes to the all-services carrier and periodically scans for a best-effort carrier.

BEST AVAILABLE COPY

WO 01/67794 A1

METHODS AND APPARATUS FOR DUAL MODE OPERATION IN A WIRELESS COMMUNICATION SYSTEM

Field of the Invention

5 The present invention relates to wireless communication systems. More particularly, the present invention pertains to methods and apparatus for dual mode operation in a wireless communication system.

Background of the Invention

10 The third generation (or "3G") of wireless communication services promises to bring unity to a fractured worldwide cellular market. 3G systems will permit seamless travel not presently available in the splintered U.S. mobile telephone service. In addition, 3G systems promise a wide array of high-speed broadband data transmission and processing, including video, on-board navigation, and Internet access.

15 One wireless standard designed to support 3G services is cdma2000™, defined by the ITU in its IMT-2000 vision. Phase one of the cdma2000 standard effort, known as "1xRTT" (i.e., Radio Transmission Technology), has already been completed and published by the Telecommunications Industry Association (TIA). 1xRTT refers to cdma2000 implementation within existing spectrum allocations for cdmaOne – 1.25 MHz carriers. The technical term is derived from $N = 1$ (i.e., use of the same 1.25 MHz carrier
20 as in cdmaOne) and the "1x" means one time 1.25 MHz. 1xRTT is backward compatible with cdmaONE networks, but offers twice the voice capacity, data rates of up to 144 kbps, and overall quality improvements.

25 Also employing a 1.25 MHz channel is the High Data Rate (HDR) technology. HDR is RF compatible with cdmaOne and 1xRTT systems and permits side-by-side deployment of transmitters and antennas in existing CDMA towers. Unlike 1xRTT, which is optimized for circuit switched services, HDR is spectrally optimized for best effort packet data transmission. HDR delivers very high-speed CDMA wireless Internet access at peak data rates greater than 1.8 Megabits per second. Notably, unlike 1xRTT, the control and data channel in an HDR carrier are time multiplexed.

Because of its high speed Internet access, it is preferable to conduct data communications over an HDR carrier, rather than on a 1xRTT carrier. Nevertheless, because HDR is packet based, it does not accommodate real time applications very well. Thus, a user of an HDR carrier who wishes to place a voice communication would need to use a carrier such as 1xRTT. U.S. Patent Application Ser. No. 09/474,056, filed December 28, 1999, discloses a hybrid network supporting both 1xRTT and HDR carriers. The hybrid network coordinates communication over either the 1xRTT or the HDR carrier as circumstances dictate. Such a hybrid network, however, requires the changes necessary in 1xRTT and HDR protocol to support this coordination.

Summary of the Invention

In accordance with a first aspect of the invention, methods and apparatus are provided for transferring communications at a terminal within an overlapping coverage area having an all-services carrier and a best-efforts carrier, wherein the all-services carrier supports real-time and non-real-time services and the best-efforts carrier supports only non-real-time services. In one embodiment, the all-services carrier is a 1xRTT carrier and the best-efforts carrier is an HDR carrier. Notably, there are always two carriers for both 1xRTT and HDR: one for the forward link and one for the reverse link. As used herein, "carrier" will collectively refer to both the forward and reverse link carriers. In alternate embodiments, the all-services carrier may be a CDMA circuit switched carrier and the best-efforts carrier may be a TDMA packet switched carrier.

In a preferred embodiment, a terminal tunes to a HDR carrier when in an idle state. The terminal periodically scans a 1xRTT carrier for pages, SMS and other information such as information sent via wavelength communications. Should the scan detect an incoming communication on the 1xRTT carrier, any existing HDR packet data communication is terminated so that the terminal may tune to the 1xRTT carrier to receive the incoming communication. If the coverage area does not support an HDR carrier, the terminal tunes to the 1xRTT carrier and periodically scans for an HDR carrier.

In another preferred embodiment, a terminal is provided with a transceiver capable of being tuned to a HDR carrier or to a 1xRTT carrier, and a processor capable of tuning the transceiver based on the type of communication the terminal is engaged in. Thus, the processor tunes the transceiver to a HDR carrier for non-real-time packet data communications, and to a 1xRTT carrier for voice communications or packet data communications.

In accordance with another aspect of the invention, a wireless communications network includes an HDR carrier for non-real-time packet data communications, a 1xRTT carrier for 1xRTT communications or packet data communications, and a plurality of terminals. Each terminal is provided with a transceiver capable of being tuned to a HDR carrier or to a 1xRTT carrier, and a processor capable of tuning the transceiver based on the type of communication the terminal is engaged in, such as the terminal described above.

Brief Description of the Drawings

Preferred embodiments of the present invention are illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings, in which like

5 reference numerals refer to like components, and in which:

Fig. 1 is a block diagram of both a 1xRTT and an HDR network having an overlapping coverage area.

Fig. 2 is a communication flow diagram according to one embodiment of the invention.

10 Fig. 3 is a communication flow diagram according to one embodiment of the invention.

Fig. 4 is a communication flow diagram according to one embodiment of the invention.

15 Fig. 5 is a block diagram illustrating a terminal capable of dual mode operation in accordance with one embodiment of the invention.

Detailed Description of the Preferred Embodiments

Figure 1 illustrates coverage area 100 supported by both an all-services carrier, in this embodiment a 1xRTT network, and a best-efforts carrier, in this embodiment a HDR network. Users at terminals such as a laptop computer 110 having a wireless transceiver or a handset 115 may communicate over either an HDR carrier 120 or a 1xRTT carrier 125 as long as the terminal is configured for dual mode operation. The 1xRTT carrier 125 carries 1xRTT communications, which may include voice, packet data, or other multi services such as Short Message Services (SMS) or broadcast information services. The HDR carrier 120 is a carrier used only for the transmission of non-real-time packet data.

10 An HDR transmitter 130 under the control of an HDR base station controller 135 transmits the HDR carrier 120. The HDR base station controller 135 couples to a packet data core network 155. Packet data from the Internet 150 couples through the packet data core network 155 to the HDR base station controller and ultimately to the terminals 110 and 115.

15 Voice communications are carried only by the 1xRTT carrier 125 transmitted by a 1xRTT transmitter 131 under the control of a 1xRTT base station controller 136. A mobile switching center 140 connects a public switched telephone network (PSTN) 145 with the 1xRTT base station controller 136. Packet data from the Internet 150 couples to the mobile switching center 140 through an ISP server 160. Alternatively, packet data can

20 be connected directly to BSC 136 through the packet data core 155.

Unlike the hybrid network disclosed in the above-incorporated application Ser. No. 09/474,056, the 1xRTT and HDR carriers are separate and independent. Rather than having the network supply the coordination between these carriers, the present invention uses intelligence supplied by the terminals to control whether communications will be

25 received on a given carrier. Thus, the present invention may be denoted a "terminal-centric" approach in contrast to the "network-centric" approach disclosed in application Ser. No. 09/474,056.

Towards this end, the present invention has two main embodiments: one in which packet data communications are not transferred between the HDR and 1xRTT carriers, and

30 one in which packet data communications are transferred between the HDR and 1xRTT carriers using standard 1xRTT packet data hand-over procedures. It should be noted that acquiring a carrier signal usually encompasses the steps of tuning the terminal to the correct frequency, synchronizing the terminal timing to the correct network timing, and

then registering with the network. This process is well known in the art, however, and the invention does not depend on any particular method of acquiring a carrier. Therefore, in the discussion below, the process of acquiring a carrier will simply be referred to as tuning the terminal to the carrier. The first embodiment will now be described further:

5

No Packet Data Hand-Over Embodiment

In this embodiment the terminal tunes to the HDR carrier as the default carrier if this carrier is available. A sample communication flow procedure is illustrated in Figure 2. Here, the HDR carrier 120 is available so that the terminal "camps on" and monitors this
10 channel. The user then initiates one or more non-real-time packet data communications over the HDR carrier 120 at step 200. As demonstrated at steps 205 and 210, the terminal may periodically place the HDR packet data communication on hold and tune to the 1xRTT carrier to look for incoming 1xRTT communications directed to the terminal over the 1xRTT carrier. At step 205, because no voice communications were detected on the
15 1xRTT carrier, the terminal returns to the HDR carrier and resumes the non-real-time packet data communication. At step 210, however, the terminal detects an incoming 1xRTT communication on the 1xRTT carrier. Thus, the terminal automatically discontinues the HDR packet data communication and establishes an active 1xRTT communication. Upon termination of the 1xRTT communication at step 215, the terminal
20 tunes to the HDR carrier to re-establish the HDR packet data communication. In an alternative embodiment, the terminal may query the user whether or not to accept the incoming 1xRTT communication at step 210. In such a case, only an affirmative response by the user would lead to establishment of the active 1xRTT communication. Otherwise, the terminal would return to the HDR carrier and re-establish the HDR packet data
25 communication. For example, where the incoming 1xRTT communication is a voice communication, the terminal tunes to the 1xRTT carrier and establishes a voice communication. Once the voice communication is terminated, the terminal tunes to the HDR carrier to re-establish any HDR packet data communications that the terminal was previously engaged in.

30 When a user of the terminal initiates a 1xRTT communication, such as a voice communication, the communication must be carried out over the 1xRTT carrier. This can be illustrated in figure 2. Therefore, if a non-real-time packet data communication is in progress over the HDR carrier (step 200) when the user initiates a voice communication,

then the non-real-time packet data communication must be put on hold while the terminal is tuned to the 1xRTT carrier (step 210). The voice communication is then commenced on the 1xRTT carrier. Upon termination of the voice communication, the terminal is tuned to the HDR carrier and the non-real-time packet data communication is re-established (step 5 215).

Note that the above scenarios require the terminal to be in the footprint or coverage area of both an HDR and a 1xRTT transmitter. Figure 3 presents the communication flow scenario if an HDR carrier is unavailable. Because the default mode is to camp on the HDR carrier, the terminal will periodically scan for the availability of the HDR carrier at steps 220 and 230. At step 220, no HDR carrier is available so the terminal must re-tune to the 1xRTT carrier. However, at step 230, the terminal, having moved into an area of HDR coverage, detects and tunes to the HDR carrier. Note that if a 1xRTT packet data communication had been established prior to step 230, this 1xRTT packet data communication would have to be terminated before the terminal could camp on the HDR carrier. Subsequent to step 230, the terminal could re-establish the packet data communication on the HDR carrier. 15

1xRTT Packet Data Hand-over Embodiment

This embodiment differs from the previously-described embodiment by employing basic 1xRTT packet data hand-over procedures to maintain continuity of packet data communications between the HDR and 1xRTT carriers. Figure 4 shows the communication flow for a transition from HDR to the 1xRTT carrier. At step 250, the terminal establishes an HDR packet data communication. At step 260, the terminal tunes to the 1xRTT carrier to establish a 1xRTT communication. The impetus to tune to the 1xRTT carrier may have resulted from a periodic scan such as discussed with respect to Figure 2 or may have resulted from the user desiring to place a voice communication. Because the terminal is tuned to the 1xRTT carrier while an active HDR packet data communication is in progress, the terminal sends a hand-over request to the network prior to step 260. As the terminal tunes to the 1xRTT network, a standard 1xRTT packet hand-over procedure is followed to transfer the packet data communication to the 1xRTT carrier. Thus, at step 270, an active 1xRTT and an active data communication are present on the 1xRTT carrier. Upon termination of the 1xRTT communication at step 280, the 20 25 30

terminal again sends a 1xRTT hand-over request to the network with information about the target HDR base station controller.

Just as discussed with respect to Figure 3, the terminal may be in an area not supporting an HDR carrier. The terminal would, while camping on the 1xRTT carrier, periodically scan for the presence of an HDR carrier. Upon detecting the HDR carrier, should the terminal have an active 1xRTT packet data communication in progress, it will send a 1xRTT hand-over request to the network as discussed with respect to Figure 4. The request should contain information about the target base station controller. In addition, point-to-point protocol (PPP) state information will be transferred between the HDR and 1xRTT base station controllers. Upon acknowledgement from the network of the hand-over request, the terminal tunes to the HDR carrier and the packet data communication resumes as a non-real-time packet data communication.

Figure 5 illustrates an example architecture for a terminal in accordance with one embodiment of the invention. Terminal 500 comprises an antenna 502 for receiving Radio Frequency (RF) carrier signals. For example, antenna 502 may receive 1xRTT carrier 125 signals and HDR carrier 120 signals. Antenna 502 is also configured to transmit RF signals that are encoded with data to be communicated to the network. Duplexer 504 is coupled to antenna 502 and switches the antenna between receive and transmit paths within terminal 500.

The receive path comprises a Low Noise Amplifier (LNA) 506 that amplifies the received RF carrier signals to a suitable level for further processing. The amplified signal is then passed to a demodulation circuit 510. In a typical receive path, demodulation circuit 510 will consist of two stages. In the first stage, an RF mixer 512 mixes the received RF signal down to an Intermediate Frequency (IF) signal by mixing the RF received signal with an RF Local Oscillator (RFLO) 522 signal. In the second stage, the IF signal is mixed with an IFLO 524 in order to step the IF signal down to a baseband signal. The baseband signal is then coupled to a processor 526 that decodes any data contained in the baseband signal. Generically, processor 526 is typically referred to as a baseband processor.

Conversely, in the transmit path, data to be communicated to the network is encoded onto a baseband signal by processor 526 and coupled to modulation circuit 520. Modulation circuit 520 mixes the baseband signal up to an IF signal in mixer 518 by mixing the baseband signal with IFLO 524. The IF signal is then mixed up to an RF

signal in mixer 516 by mixing the IF signal with RFLO 522. The RF signal is then amplified by a Power Amplifier (PA) 508 to ensure that the RF signal transmitted by antenna 502 is of sufficient power.

5 In the transmit path, RFLO 522 must be tuned to produce the correct RF carrier signal. For example, if terminal 500 is communicating non-real-time packet data, then RFLO 522 must be tuned to produce an RF signal with the appropriate HDR carrier frequency. If, on the other hand, terminal 500 is engaged in voice communication, then RFLO must be tuned to produce a RF signal with the appropriate 1xRTT carrier frequency.

10 Figure 5 illustrates that in a typical embodiment, processor 526 controls the tuning of RFLO 522. Processor 526 also tunes IFLO 524 if required; however, IFLO 524 may remain at the same frequency with only RFLO 522 being tuned. In fact, those skilled in the art will understand that some embodiments of terminal 500 may not include IFLO 524 or mixers 514 and 518. In this case, RF mixer 512 converts the received RF carrier
15 directly to baseband, and RF mixer 516 converts the baseband signal coupled from processor 526 directly to an RF signal. This type of architecture is termed direct conversion architecture.

Regardless of the specific architecture, the transmit and receive paths are typically included in one unit termed a transceiver. Therefore, in a typical embodiment, processor
20 526 is responsible for tuning the transceiver to the appropriate carrier in order to carry out the processes of figures 2, 3, and 4.

While the many aspects of the present invention are susceptible to various modifications and alternative forms, specific examples thereof have been shown by way of example in the drawings and are herein described in detail. It should be understood,
25 however, that the invention is not to be limited to the particular forms or methods disclosed, but to the contrary, the invention is to cover all modifications, equivalents, and alternatives falling within the scope of the appended claims.

CLAIMS

1. A method of wireless communication employing a terminal, the terminal configured to tune either to a best-effort carrier or an all-service carrier, the method comprising:

- 5 (a) tuning the terminal to a best-effort carrier;
- (b) establishing a packet data communication over the best-effort carrier using the terminal; and
- (c) periodically tuning the terminal to an all-service carrier for a limited time in order to check for incoming all-service communications.

10

2. The method of claim 1, further comprising:

- (d) establishing an all-service communication over the all-service carrier when an incoming all-service communication is detected in step (c); and
- (e) tuning the terminal back to the best-effort carrier when the all-
- 15 service communication is terminated.

3. The method of claim 2, wherein step (d) further comprises:

- (f) sending a packet hand-over request from the terminal to transfer the packet data communication from the best-effort carrier to the all-service carrier;
- 20 (g) handing the packet data communication over to the all-service carrier from the best-effort carrier; and
- (h) establishing the all-service communication over the all-service carrier, while also maintaining the packet data communication over the all-service carrier.

25

4. The method of claim 3, further comprising:

- (i) tuning the terminal back to the best-effort carrier when the all-service communication is terminated;
- (j) sending a packet hand-over request from the terminal to transfer the packet data communication from the all-service carrier to the best-effort carrier;
- 30 (k) handing the packet data communication over to the best-effort carrier from the all-service carrier.

5. The method of claim 4, wherein the terminal is configured to optionally establish the all-service communication.

6. The method of claim 1, wherein the all-service communication includes at least one of the following:

- (a) a voice communication;
- (b) a SMS communication; and
- (c) a broadcast information communication.

7. The method of claim 1, wherein the all-service carrier comprises an 1xRTT carrier.

8. The method of claim 1, wherein the best-effort carrier comprises an HDR carrier.

15

9. A method of wireless communication employing a terminal, the terminal configured to tune either to a best-effort carrier or an all-service carrier, the method comprising:

- (a) tuning the terminal to a best-effort carrier;
- (b) establishing a packet data communication over the best-effort carrier using the terminal;
- (c) while the packet data communication is in progress, tuning the terminal to an all-service carrier; and
- (d) establishing all-service communication on the all-service carrier.

25

10. The method of claim 9, further comprising:

- (e) tuning the terminal back to the best-effort carrier when the all-service communication is terminated in order to complete the packet data communication.

30

11. The method of claim 9, wherein step (d) further comprises:

- (f) sending a packet hand-over request from the terminal to transfer the packet data communication from the best-effort carrier to the all-service carrier;

12

(g) handing the packet data communication over to the all-service carrier from the best-effort carrier; and

(h) establishing the all-service communication over the all-service carrier, while also maintaining the packet data communication over the all-service carrier.

5

12. The method of claim 11, further comprising:

(i) tuning the terminal back to the best-effort carrier when the all-service communication is terminated;

10 (j) sending a packet hand-over request from the terminal to transfer the packet data communication from the all-service carrier to the best-effort carrier;

(k) handing the packet data communication over to the best-effort carrier from the all-service carrier.

15 13. The method of claim 9, wherein the all-service communication is at least one of the following:

(a) a voice communication;

(b) a SMS communication; and

(c) a broadcast information communication.

20 14. The method of claim 9, wherein the all-service carrier comprises an 1xRTT carrier.

15. The method of claim 9, wherein the best-effort carrier comprises an HDR carrier.

25

16. A method of wireless communication employing a terminal, the terminal configured to tune either to a best-effort carrier or an all-service carrier, the method comprising:

(a) periodically scanning for a best-effort carrier;

30 (b) tuning the receiver to an all-service carrier;

(c) establishing a packet data communication on the all-service carrier after tuning in step (b);

13

(d) periodically scanning for a best-effort carrier once the terminal is tuned to the all-service carrier;

(e) if a best-effort carrier is available, tuning the terminal to the best-effort carrier; and

5 (f) establishing the packet data communication on the best-effort carrier.

17. The method of claim 16, wherein the packet data communication on the all-service carrier is terminated prior to step (e).

10

18. The method of claim 16, wherein step (f) further comprises:

(g) sending a packet hand-over request from the terminal to transfer the packet data communication from the all-service carrier to the second best-effort carrier; and

15 (h) handing the packet data communication over to the second best-effort carrier from the all-service carrier.

19. The method of claim 16, wherein the all-service carrier comprises an 1xRTT carrier, and wherein the best-effort carrier comprises an HDR carrier.

20

20. A terminal for wireless communication, comprising:

a transceiver configured to selectively tune to a best-effort carrier or to an all-service carrier; and

25 a processor configured to periodically tune the transceiver to the all-service carrier to check for an incoming all-service communication while a packet data communication is occurring over the best-effort carrier and to tune the terminal to the all-service carrier and establish an all-service communication over the all-service carrier when an incoming all-service communication is detected.

30 21. The terminal of claim 20, wherein the processor is further configured to tune to an all-service carrier when best-effort carriers are unavailable and to periodically scan for best-effort carriers until one is available, and wherein the processor is configured to tune to a best-effort carrier when one is available.

22. The terminal of claim 20, wherein the processor is further configured to tune to an all-service carrier, while a packet data communication is taking place over a best-effort carrier, and establish an all-service communication over the all-service carrier.

5

23. The terminal of claim 20, wherein the processor is further configured to initiate a packet hand-over request in order to transfer packet data communications from a best-effort carrier to an all-service carrier, or to transfer packet data communications from an all-service carrier to a best-effort carrier.

10

24. The terminal of claim 20, wherein the all-service communication is at least one of the following:

- (a) a voice communication;
- (b) a SMS communication; and
- (c) a broadcast information communication.

15

25. The terminal of claim 20, wherein the all-service carrier comprises an 1xRTT carrier.

20

26. The method of claim 20, wherein the best-effort carrier comprises an HDR carrier.

27. The terminal of claim 20, wherein the all-service carrier supports real-time and non-real-time services, and wherein the best-effort carrier supports only non-real-time services.

25

28. The terminal of claim 27, wherein the all-service carrier is optimized for circuit switched services, and wherein the best-effort carrier is optimized for best effort packet data services.

30

29. The terminal of claim 28, wherein the control and data channel in the best-effort carrier are time multiplexed.

30. A wireless communication network, comprising:
an all-service carrier configured to carry all-service communications and
packet data communications;
a best-effort carrier configured to carry packet data communications; and
5 a plurality of terminals configured to periodically tune to the all-service
carrier to check for an incoming all-service communication while a packet data
communication is occurring over the best-effort carrier and to tune to the all-service
carrier and establish an all-service communication over the all-service carrier when an
incoming all-service communication is detected.

10 31. The network of claim 30, wherein each terminal is further configured to
initiate a packet hand-over request in order to transfer packet data communications from a
best-effort carrier to an all-service carrier, or to transfer packet data communications from
an all-service carrier to a best-effort carrier.

15 32. The network of claim 31, wherein each hand-over request will contain
information about a target BSC associated with the all-service or best-effort carrier that is
the target of the hand-over.

20 33. The network of claim 30, wherein the all-service carrier supports real-time
and non-real-time services, and wherein the best-effort carrier supports only non-real-time
services.

25 34. The network of claim 33, wherein the all-service carrier is optimized for
circuit switched services, and wherein the best-effort carrier is optimized for best effort
packet data services.

30 35. The network of claim 34, wherein the control and data channel in the best-
effort carrier are time multiplexed.

36. The network of claim 30, wherein the all-service carrier is a 1xRTT carrier.

37. The network of claim 30, wherein the best-effort carrier is a HDR carrier.


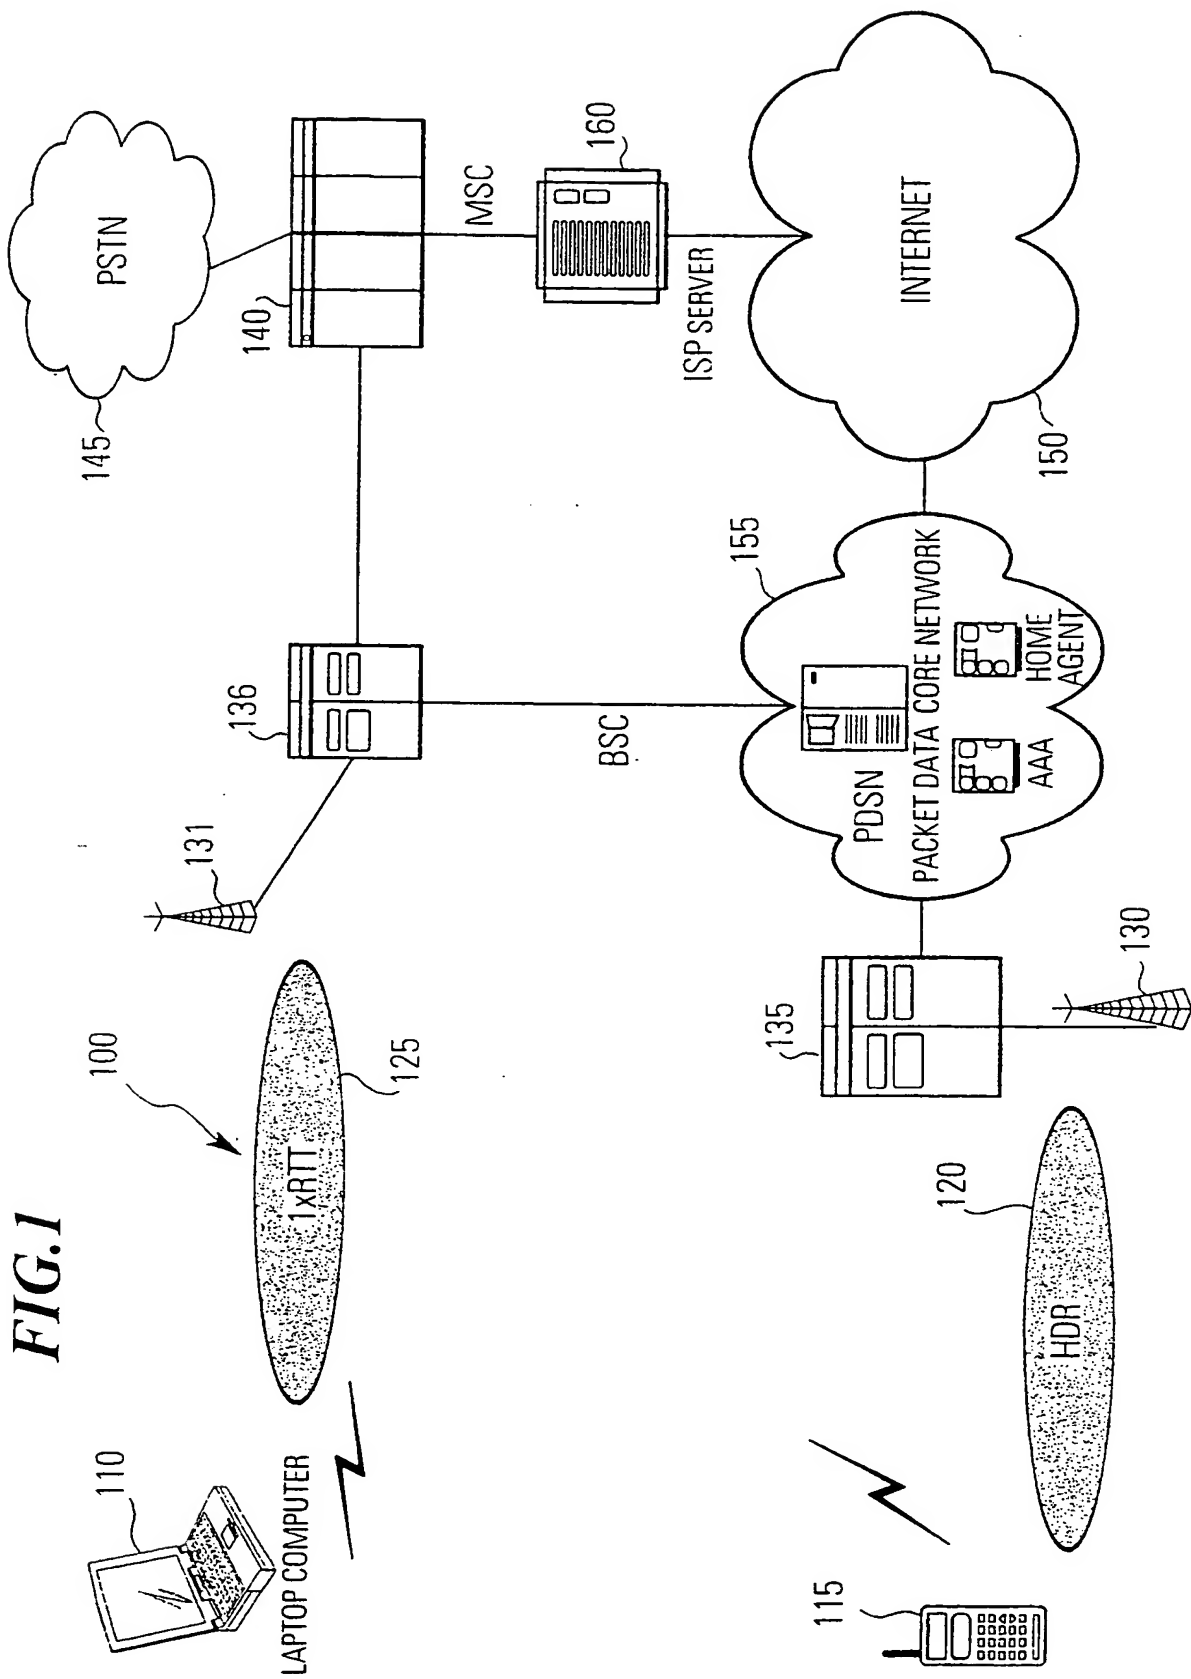


FIG.1

FIG.2

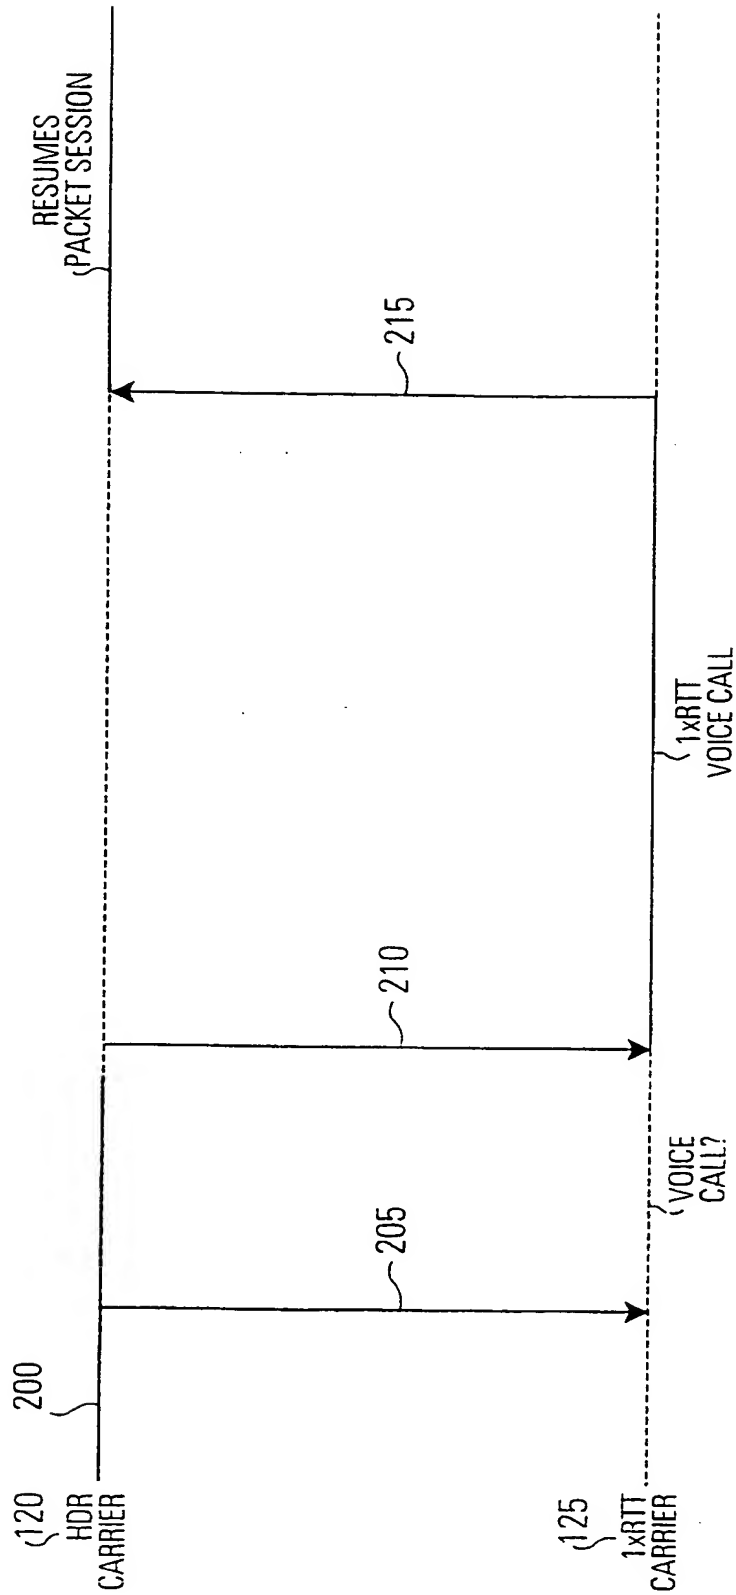

3/5

FIG.3

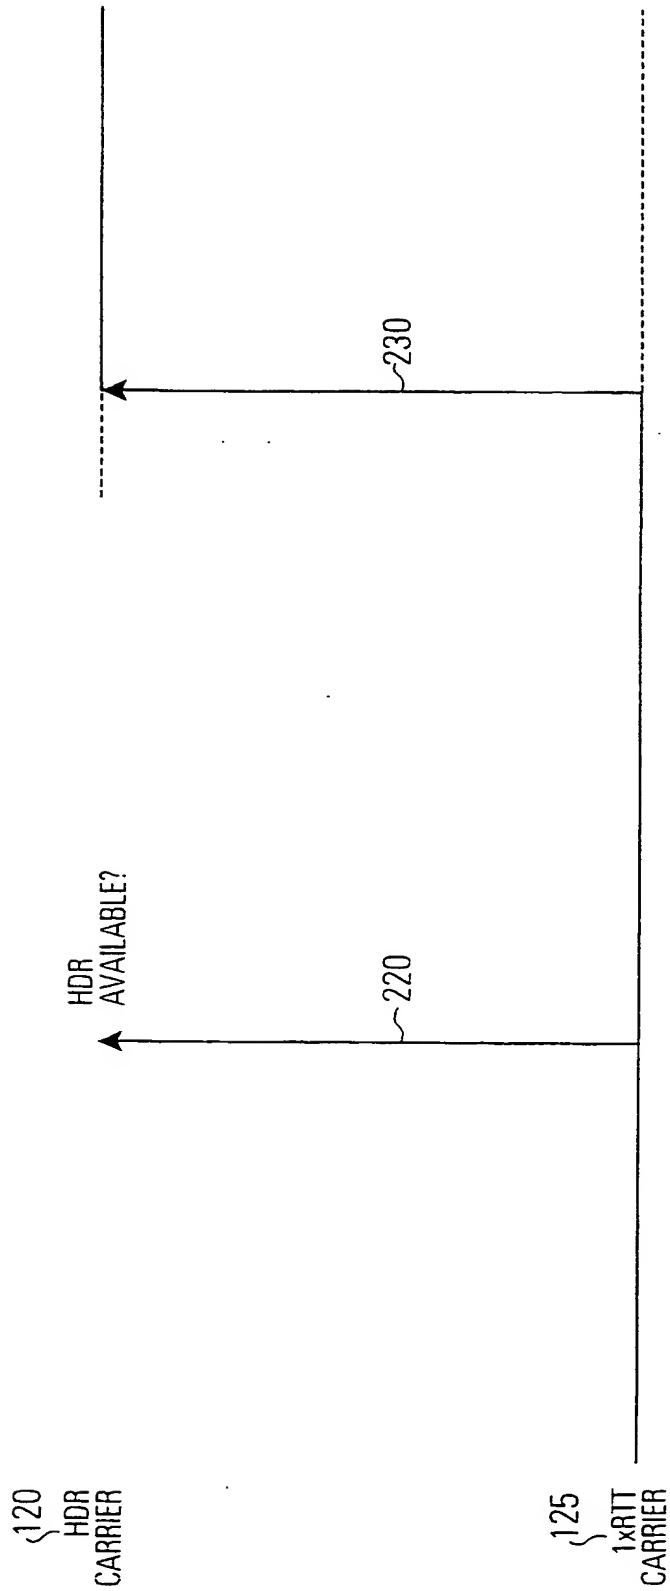


FIG. 4


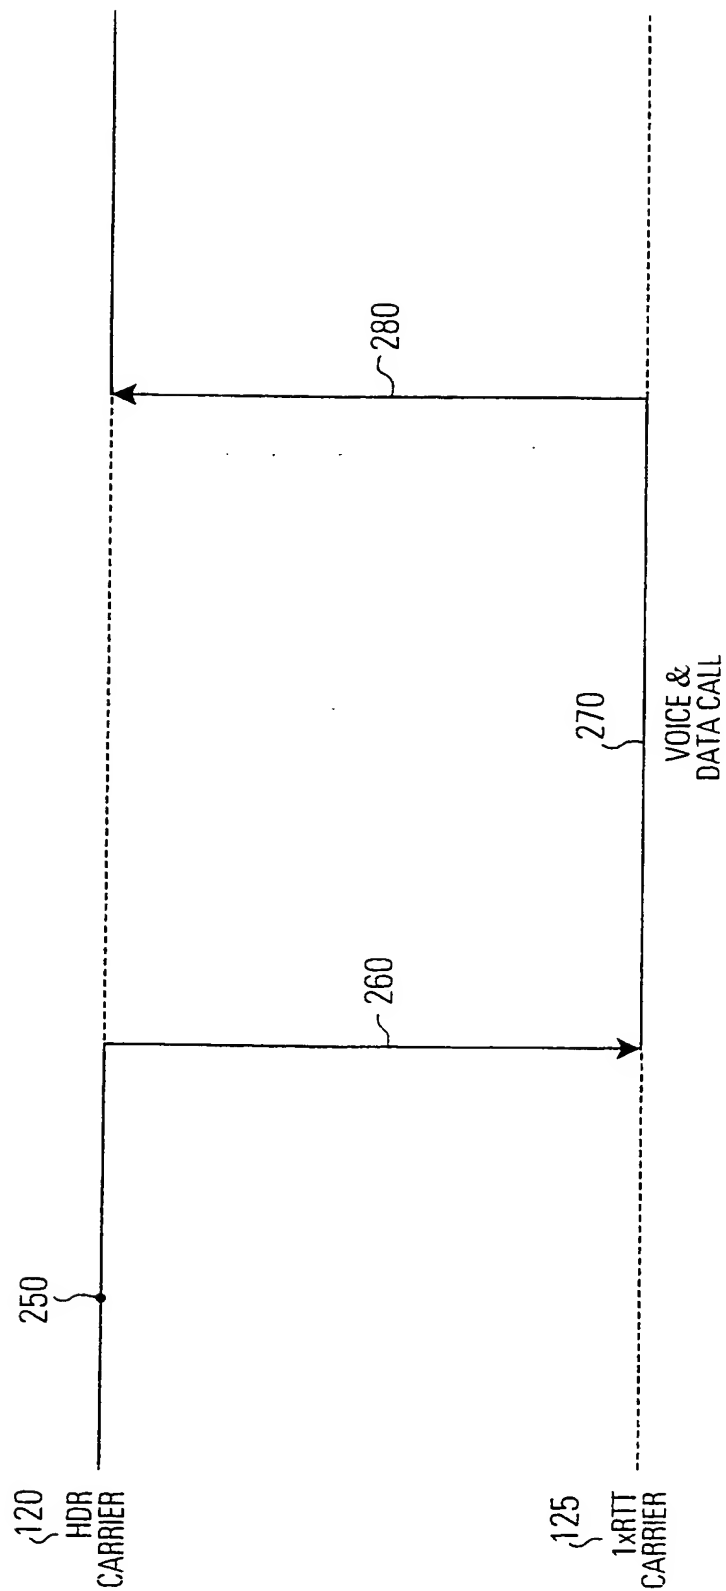


FIG.5

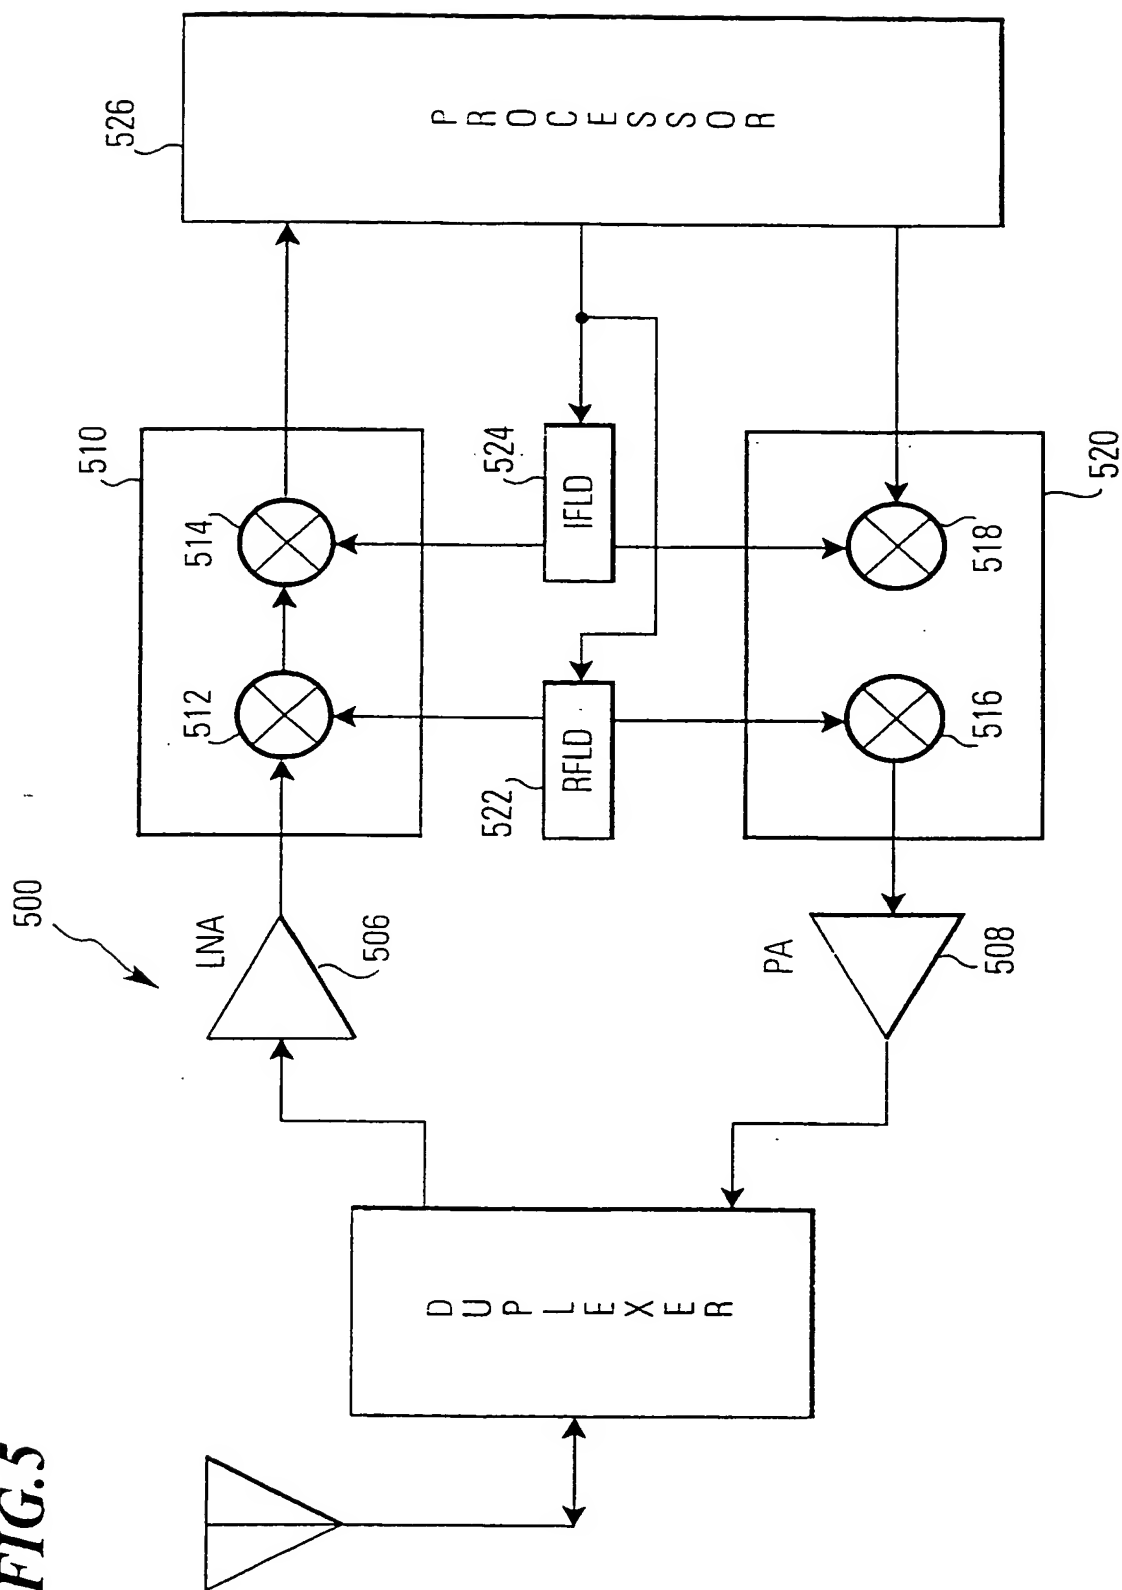

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/02401

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04Q7/38 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 2 301 992 A (NIPPON TELEGRAPH & TELEPHONE CORP.) 18 December 1996 (1996-12-18) figure 4B page 13, line 20 -page 14, line 4 ---	1,9,16, 20,30
A	WO 95 25407 A (SIERRA WIRELESS, INC.) 21 September 1995 (1995-09-21) abstract; figures 1A-2 claims 13-16 ---	1,9,16, 20,30
A	US 5 936 952 A (LECOMTE) 10 August 1999 (1999-08-10) abstract; figure 1 column 4, line 35 -column 5, line 12 --- -/--	1,9,16, 20,30

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

18 July 2001

Date of mailing of the international search report

26/07/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.
Fax: (+31-70) 340-3016

Authorized officer

Danielidis, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 01/02401

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99 49690 A (TELIA AB) 30 September 1999 (1999-09-30) abstract; figures 1,2 page 6, line 13 -page 7, line 21 ---	1,9,16, 20,30
A	WO 99 16266 A (TELEFONAKTIEBOLAGET LM ERICSSON) 1 April 1999 (1999-04-01) abstract; figures 2,4,7,8,11 page 27, line 15 -page 28, line 8 ---	1,9,16, 20,30
A	WO 95 31060 A (MOTOROLA INC.) 16 November 1995 (1995-11-16) abstract; claims 5,6; figures 3,4 page 7, line 6 - line 26 ---	1,9,16, 20,30
A	WO 99 52236 A (OMNIPOINT TECHNOLOGIES, INC.) 14 October 1999 (1999-10-14) page 5, line 1 -page 6, line 19 -----	1,9,16, 20,30

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/02401

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 2301992 A	18-12-1996	CN 1146111 A	26-03-1997
		HK 1003554 A	28-04-2000
		JP 9055768 A	25-02-1997
		SG 64388 A	27-04-1999
		US 5881061 A	09-03-1999
WO 9525407 A	21-09-1995	AU 1943595 A	03-10-1995
US 5936952 A	10-08-1999	FR 2748172 A	31-10-1997
		EP 0806856 A	12-11-1997
WO 9949690 A	30-09-1999	EP 1064815 A	03-01-2001
		NO 20004659 A	25-09-2000
		SE 9800978 A	25-09-1999
WO 9916266 A	01-04-1999	AU 9287698 A	12-04-1999
		BR 9812522 A	25-07-2000
		EP 1018275 A	12-07-2000
		ZA 9808571 A	31-03-1999
WO 9531060 A	16-11-1995	US 5729544 A	17-03-1998
		AU 2128995 A	29-11-1995
		ZA 9503607 A	03-01-1996
WO 9952236 A	14-10-1999	AU 3370999 A	25-10-1999
		EP 1068692 A	17-01-2001

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

This Page Blank (uspto)